


Description

Border Stair Nosing made of high-density PVC. It offers an non-slip finish.



Profile

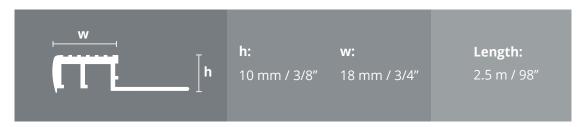

Check availability of other sizes in your country.

Uses and applications

It protects step edges and offers high-level safety thanks to the anti-slip tread surface.

Uses: recommended for residential interior applications or of similar use with low pedestrian traffic.



Advantages

- The width of the treading surface is 18 mm / 0.70".
- It must be placed during coating installation.







1/2



Material properties

PVC:

- Made of high-impact virgin PVC.
- · Good mechanical resistance.
- · Resistant to corrosion and abrasion.
- Low maintenance, impermeable to liquids.
- U.V treatment.

Installation method

- 1. Measure the height and length of the step where you will place the profile.
- 2. Cut the Border stair nosing.
- 3. Coat the riser (vertical side and step).
- 4. Then apply glue on the horizontal surface and remove the excess from the edges.
- 5. Fill the profile and place it.
- 6. Make sure that the glue that sticks out of the "A"-shaped perforations reaches the coating to guarantee good adherence.
- 7. Place the ceramic tile on the profile and press.
- 8. Fill the joints and clean immediately upon completion with a damp cloth or sponge to remove adhesive excess.



Cleaning and maintenance

PVC stair noising does not require any kind of special maintenance since the surface is not porous, although it is sensitive to certain solvents. It is advisable to scrub manually with neutral detergent or polymeric detergent.



